



## Quantifying the potential of local stormwater infiltration measures in western Copenhagen

**Bergman, Maria; Fryd, Ole; Jeppesen, Jan; Mikkelsen, Peter Steen; Mark, Ole; Bergen Jensen, Marina; Binning, Philip John**

*Publication date:*  
2011

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Bergman, M., Fryd, O., Jeppesen, J., Mikkelsen, P. S., Mark, O., Bergen Jensen, M., & Binning, P. J. (2011). *Quantifying the potential of local stormwater infiltration measures in western Copenhagen*. Poster session presented at Cities of the Future 2011 , Stockholm, Sweden.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.





# Quantifying the potential of local stormwater infiltration measures in western Copenhagen

Maria Bergman<sup>1</sup>, Ole Fryd<sup>2</sup>, Jan Jeppesen<sup>3</sup>, Peter Steen Mikkelsen<sup>1</sup>, Ole Mark<sup>4</sup>, Marina Bergen Jensen<sup>2</sup>, Philip Binning<sup>1</sup>

<sup>1</sup>Technical University of Denmark, <sup>2</sup>Copenhagen University, <sup>3</sup>Alectia A/S, <sup>4</sup>DHI Water & Environment  
E-mail: mkbe@env.dtu.dk



## Introduction and problem definition


Frequent combined sewer overflows (CSOs) to the Harrestrup river in western Copenhagen lead to poor water quality in the estuary Kalveboderne. To solve this we need to greatly reduce the number of annual CSOs to the Harrestrup river, from today's 15 to 1 CSO per year and structure.

*Copenhagen Municipality (2007), in:  
"Vision for the Harrestrup river system and Kalveboderne"*

Local stormwater solutions are important in adaptation to climate change.

*Copenhagen Municipality (2010), in:  
"Climate Adaptation Plan (Københavns Klimatilpasningsplan)"*

## Case study area: Husum in western Copenhagen

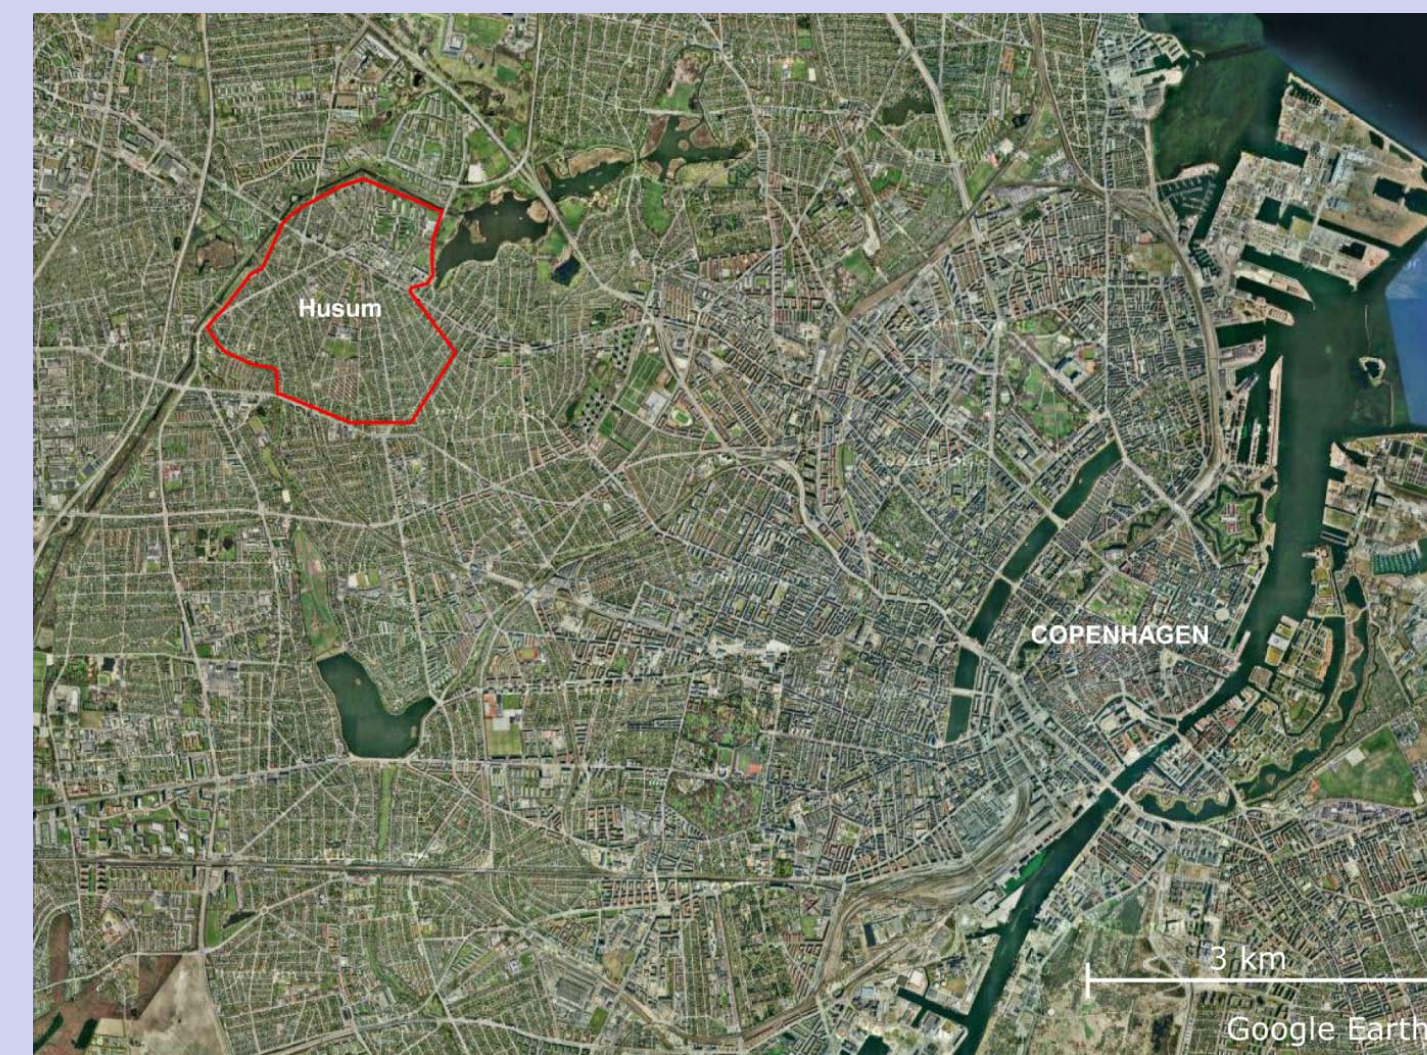

- 300 ha in the upstream part of Harrestrup river catchment
- Mainly residential area: single family houses and a few apartment blocks
- Restrictions for infiltration: drinking water interests, low permeability soils (glacial till), high groundwater table

## How can we make a realistic estimate of the amount of stormwater that can be infiltrated in Husum?


**Input: Estimate from Copenhagen municipality:**

13 900 m<sup>3</sup> of extra storage volume needed in Husum to reach our goal

**First estimate of necessary infiltration trench volume in each subcatchment.**

- 15 subcatchments selected based on:
- Should drain to structures with the most CSO's
  - At least 2 ha reduced area

Estimated total needed volume is partitioned between selected subcatchments relative to reduced area in each subcatchment

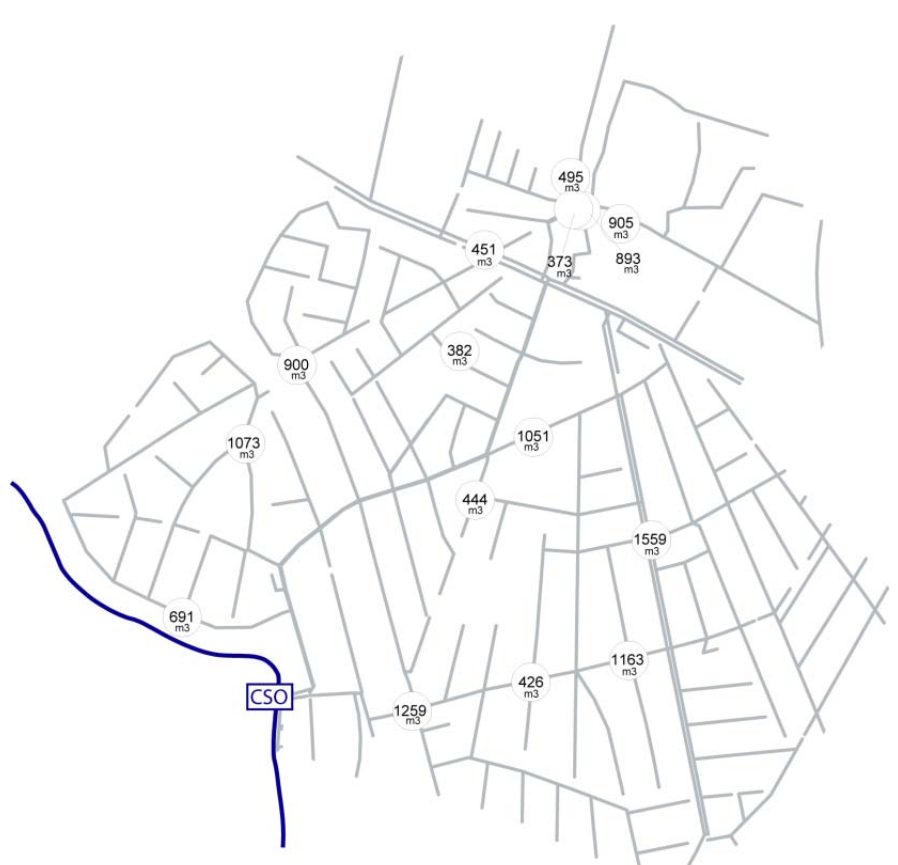

**Input: Catchment and urban drainage network model of Husum:**

60 subcatchments, 116 ha reduced area

## Methodology: A cross-disciplinary and iterative approach

Environmental engineer ↔ Physical planner ↔ Hydrologist

**GIS analysis: How much infiltration trench volume is realistic, and where?**


Principal conditions:

- > 2 m distance to buildings
- > 25 m distance to drinking wells
- > 5 m distance to streams
- No infiltration in contaminated soils



**Groundwater model: How much of the precipitation can be infiltrated?**

Fraction of total precipitation that can be infiltrated with acceptable rise in groundwater level

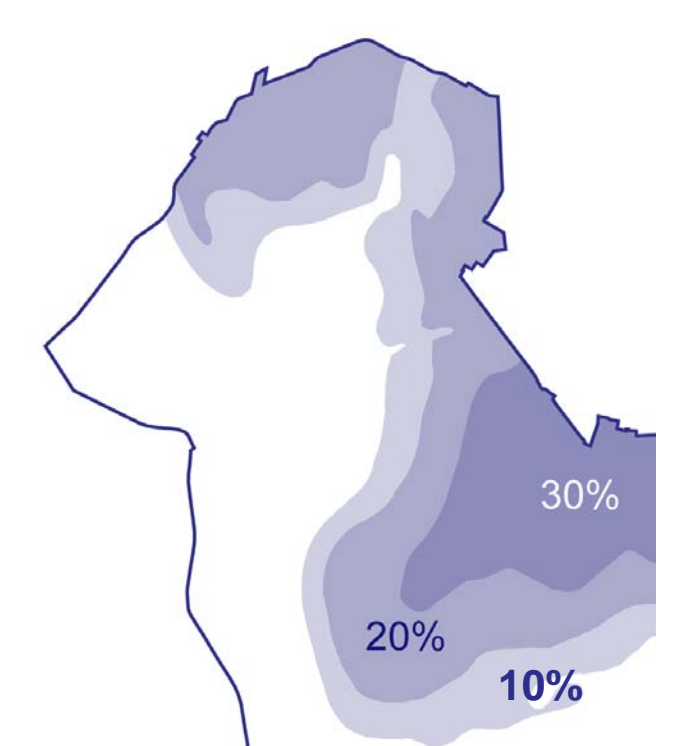


**GIS analysis:**

- Areas complying with
- Principal conditions
  - Groundwater conditions

**OPTIMISTIC SCENARIO**  
(only considers available area)

Colours denote disconnected areas in different subcatchments  
Values in circles indicate disconnected area in m<sup>2</sup>

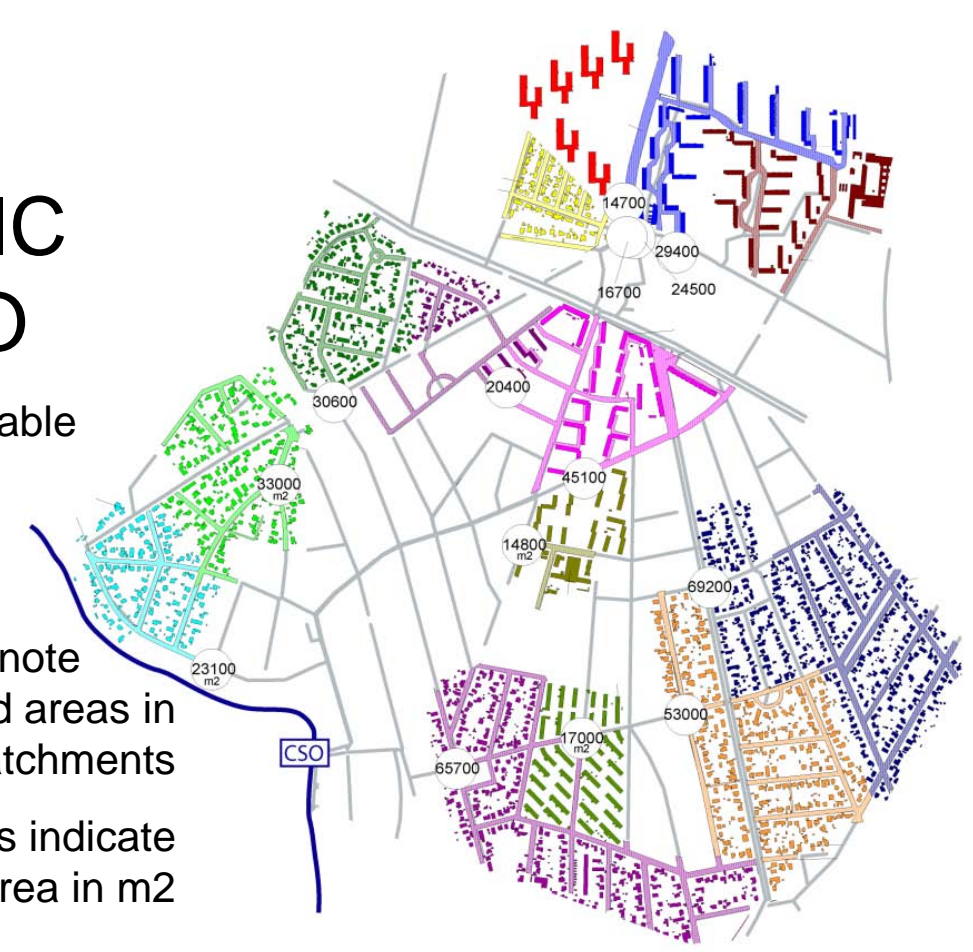

**CONSERVATIVE SCENARIO**  
(Considers available area and groundwater level)

Level of transparency indicates the allowed infiltration fraction




**Catchment and urban drainage model: Simulation of trenches, runoff, pipe flow and overflows. Result evaluation**

Rainfall series for year 1997 (representative for average runoff and overflow volume and frequency) used in simulations.

## Results and evaluation

**Estimated effects of infiltration trenches in Husum on CSO discharges to Harrestrup River (year 1997)**

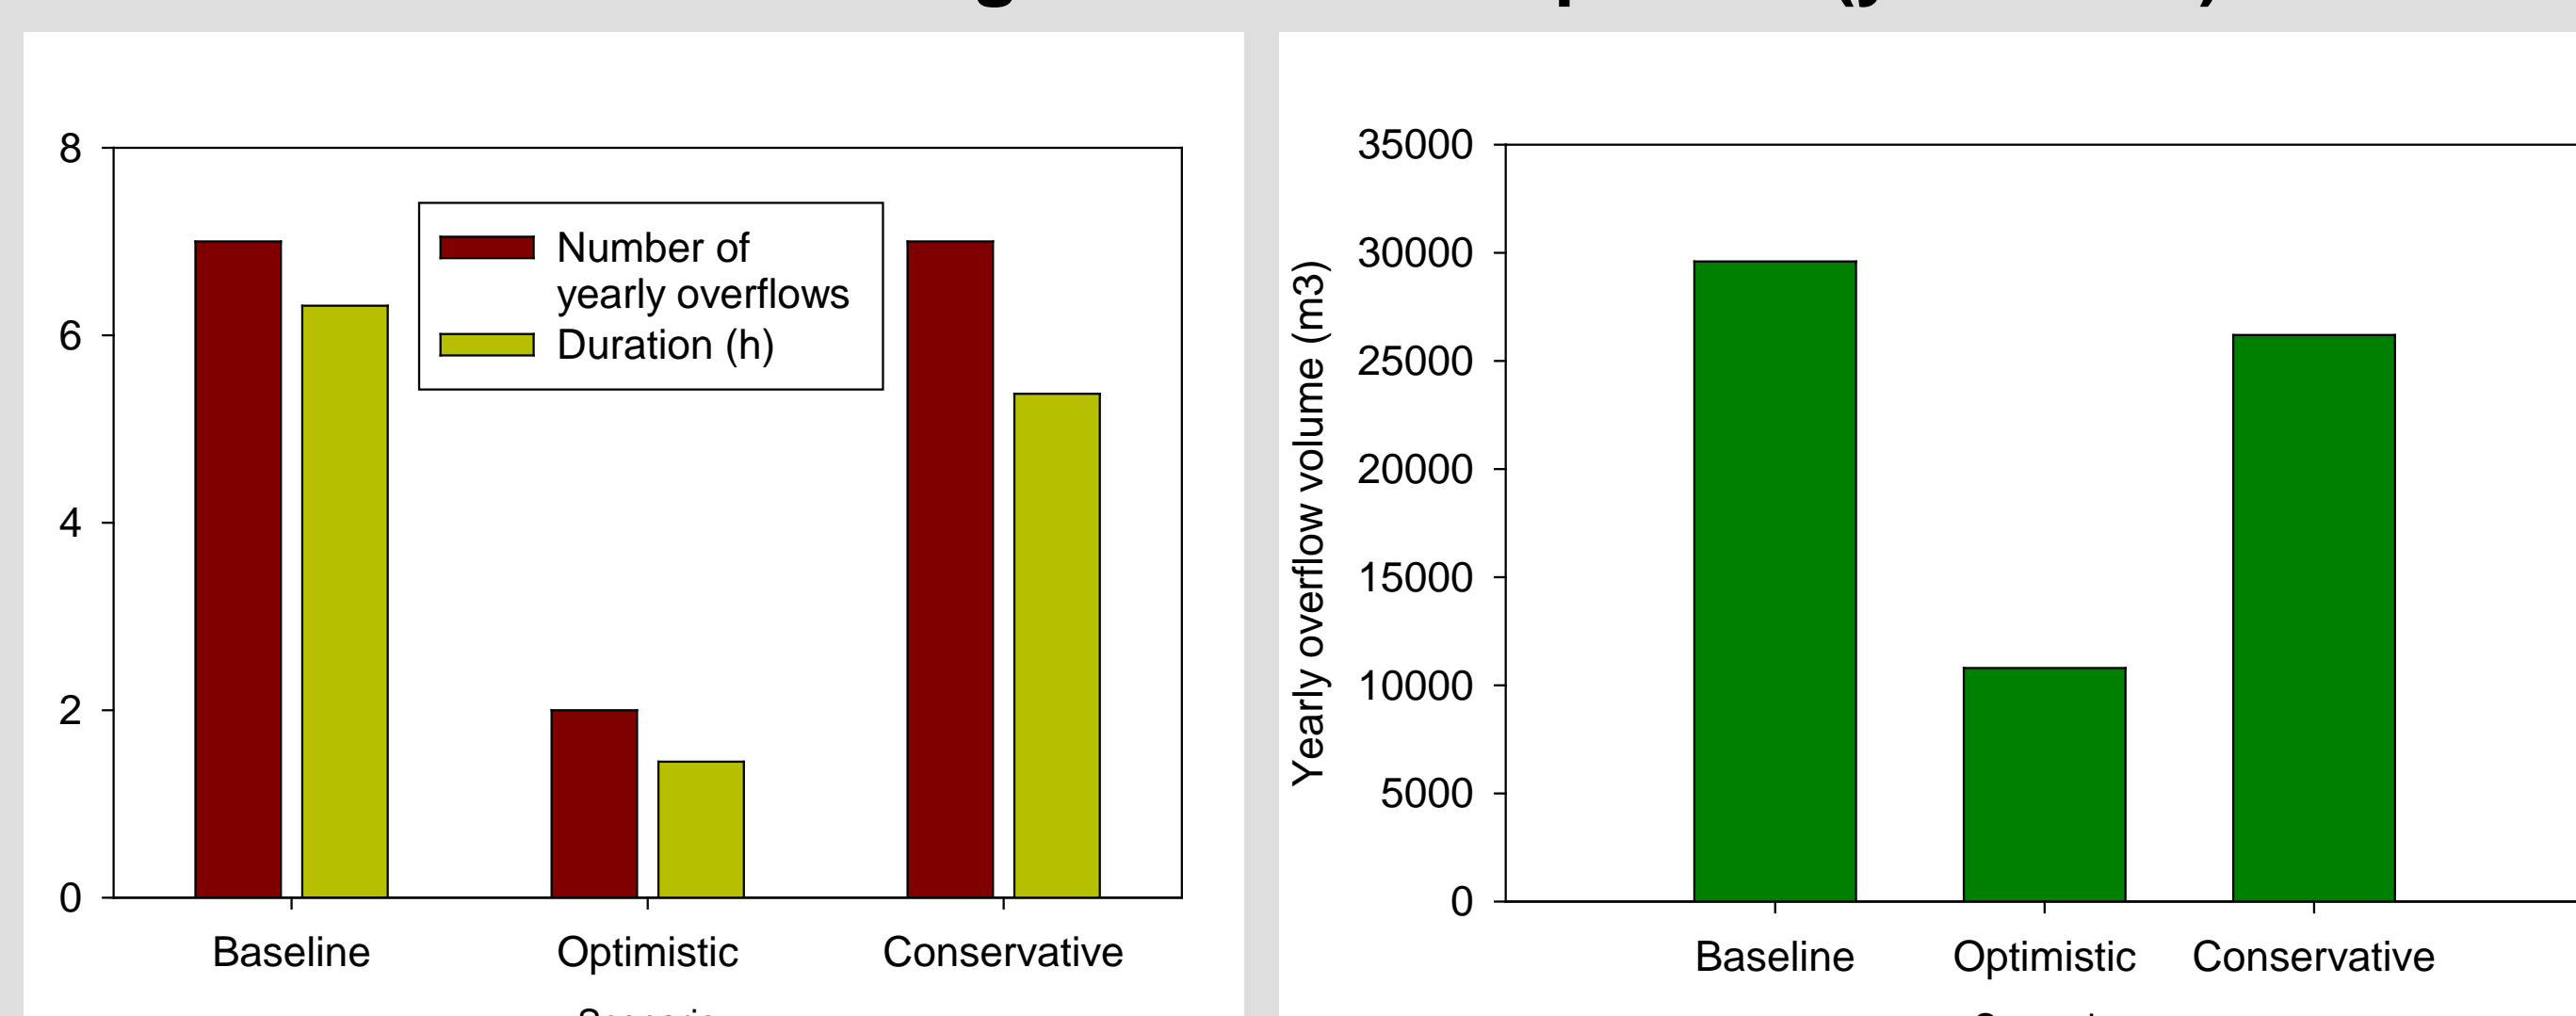

## Conclusions and future challenges

**Conclusion:**

- Our methodology can be used to estimate the amount of stormwater that can be infiltrated locally
- The estimated reduction in overflow volume is between 10% (conservative scenario) and 67% (optimistic scenario)

**Suggested future improvements:**

- Integrate groundwater model with runoff/pipe flow model
- Extend model with more types of local stormwater management structures (e.g. green roofs, permeable pavements etc.)